






**GRAVURE PROCESS FOR PRINTING ADJACENT COLOUR SURFACES  
WITH VARIOUS COLOUR COATING THICKNESSES**

<b>Publication number:</b> CA2345748 (A1)	<b>Also published as:</b>
<b>Publication date:</b> 2000-04-13	 CA2345748 (C)
<b>Inventor(s):</b> ADAMCZYK ROGER [DE]; MAYER KARLHEINZ [DE]; WISJAK EDUARD [DE]; FRANZ PETER [DE]	 DE19845436 (A1)
<b>Applicant(s):</b> GIESECKE & DEVRIENT GMBH [DE]	 WO0020216 (A1)
<b>Classification:</b>	 DK1117537 (T3)
- <b>International:</b> <i>B41C1/045; B41C1/02; B41M1/10; B41M3/00; B41M3/14; B41N1/06; B41C1/02; B41M1/10; B41M3/00; B41M3/14; B41N1/00; (IPC1-7): B41C1/04</i>	 ZA200102252 (A)
- <b>European:</b> B41M1/10; B41M3/14; B41N1/06	<a href="#">more &gt;&gt;</a>
<b>Application number:</b> CA19992345748 19990929	
<b>Priority number(s):</b> DE19981045436 19981002; WO1999EP07216 19990929	

**Abstract of CA 2345748 (A1)**

The invention relates to a data carrier with a printed image that is produced by means of a gravure process. The printed image comprises at least one first colour surface with a first colour coating thickness and a second colour surface adjacent to the first colour surface and provided with a second colour coating thickness, whereby the thicknesses of the two colour coatings are different. The first and second colour surfaces are divided by a sharp borderline that is invisible to the naked eye and the colour coating thicknesses of both colour surfaces corresponds to a minimum thickness in the region of the borderline.

.....  
Data supplied from the **esp@cenet** database — Worldwide

(12)

(21) **2 345 748**

(51) Int. Cl. 7: **B41C 1/04**

(22) **29.09.1999**

(85) **28.03.2001**

(86) **PCT/EP99/07216**

(87) **WO00/20216**

(30) **198 45 436.8 DE 02.10.1998**

(71) **GIESECKE & DEVRIENT GMBH,  
159 Prinzregentenstrasse  
D-81677, MUNCHEN, XX (DE).**


(72) **ADAMCZYK, ROGER (DE).  
WISJAK, EDUARD (DE).  
FRANZ, PETER (DE).  
MAYER, KARLHEINZ (DE).**


(74) **RIDOUT & MAYBEE**

(54) **PROCEDE D'IMPRESSION EN HELIOGRAVURE PERMETTANT D'IMPRIMER DES SURFACES  
D'IMPRESSION ADJACENTES DONT LES COUCHES D'ENCRE SONT DE DIFFERENTES EPAISSEURS**  
(54) **GRAVURE PROCESS FOR PRINTING ADJACENT COLOUR SURFACES WITH VARIOUS COLOUR  
COATING THICKNESSES**

(57)

The invention relates to a data carrier with a printed image that is produced by means of a gravure process. The printed image comprises at least one first colour surface with a first colour coating thickness and a second colour surface adjacent to the first colour surface and provided with a second colour coating thickness, whereby the thicknesses of the two colour coatings are different. The first and second colour surfaces are divided by a sharp borderline that is invisible to the naked eye and the colour coating thickness of both colour surfaces corresponds to a minimum thickness in the region of the borderline.

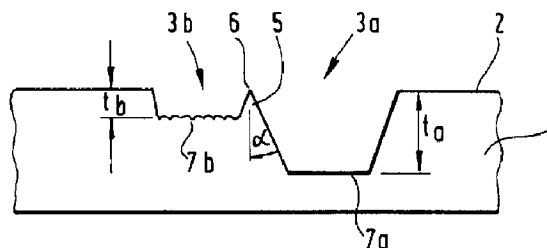



(72) MAYER, KARLHEINZ, DE

(72) ADAMCZYK, ROGER, DE

(72) WISJAK, EDUARD, DE

(72) FRANZ, PETER, DE


(71) GIESECKE & DEVRIENT GMBH, DE

(51) Int. Cl.<sup>7</sup> B41C 1/04

(30) 1998/10/02 (198 45 436.8) DE

(54) **PROCEDE D'IMPRESSION EN HELIOGRAVURE PERMETTANT  
D'IMPRIMER DES SURFACES D'IMPRESSION ADJACENTES  
DONT LES COUCHES D'ENCRE SONT DE DIFFERENTES  
EPAISSEURS**

(54) **GRAVURE PROCESS FOR PRINTING ADJACENT COLOUR  
SURFACES WITH VARIOUS COLOUR COATING  
THICKNESSES**

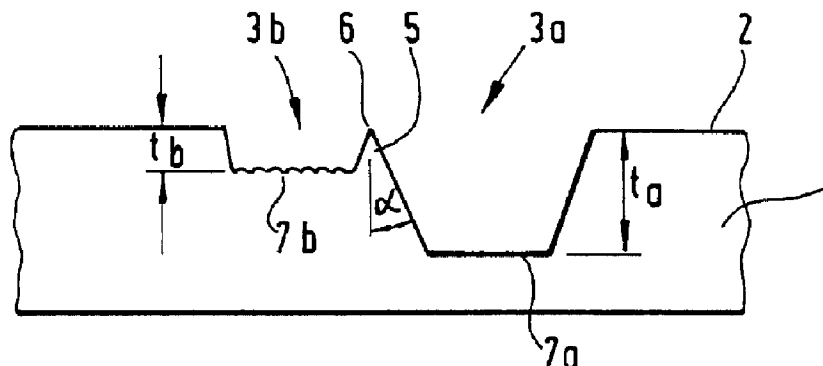

(57) The invention relates to a data carrier with a printed image that is produced by means of a gravure process. The printed image comprises at least one first colour surface with a first colour coating thickness and a second colour surface adjacent to the first colour surface and provided with a second colour coating thickness, whereby the thicknesses of the two colour coatings are different. The first and second colour surfaces are divided by a sharp borderline that is invisible to the naked eye and the colour coating thickness of both colour surfaces corresponds to a minimum thickness in the region of the borderline.



Abstract

The invention concerns a data medium with a printed image created by the intaglio printing process. The printed image has at least one first ink area with a first ink layer thickness and at least one second ink area with a second ink layer thickness adjacent  
5 to the first ink area, such that the ink layer thicknesses are different. The first and second ink areas are separated by a sharp border line invisible on examination with the naked eye, and the ink layer thickness of both ink areas passes through a minimum in the region of the border line.

Intaglio printing process for the printing of adjacent areas of ink of differing ink layer thickness

5 The invention concerns a data medium with a printed image produced by the intaglio printing process, with adjacent ink areas with different ink layer thicknesses, a intaglio printing process for the printing of adjacent ink areas, as well as printing plates for carrying out the intaglio process and a process for the manufacture of the printing plates.

10

A characteristic of intaglio printing is that in the printing - that is, the colour transferring - areas, the surface material of a printing plate is removed by means of a suitable engraving tool or by etching. Ink is applied to the finished printing plate and the surplus ink is removed from the surface of the printing plate before the actual  
15 printing procedure by means of a doctor blade or a wiping cylinder, so that the ink remains only in the depressions. Then a substrate, usually paper, is pressed against the printing plate and then pulled off again, so that the ink remains adhering to the substrate surface and forms a print image there. If translucent inks are used, the thickness of the ink application determines the colour tone.

20

With previous gravure printing techniques, a distinction has been drawn between rotogravure and intaglio printing. In the case of rotogravure, the printing plates are made by means, for instance, of an electron beam, laser beam or graver. It is a characteristic of photogravure that different grey or colour scale values in the printed  
25 image are created by cells regularly arranged in the printing plate with varying density, size and/or depth.

The intaglio printing technique, and especially the steelplate intaglio printing technique, is an important technique for the printing of data media, especially  
30 securities such as bank notes and the like. In comparison with other common printing techniques, such as offset printing, for instance, the intaglio printing process allows a very thick ink deposition onto data media. The relatively thick ink layer generated in the intaglio process is readily recognisable to the lay person as a simple authenticity feature, due to its tactile quality. This authenticity feature cannot easily be reproduced

with a simple copy, so that the intaglio printing technique offers protection against simple forgeries.

5 Intaglio printing is distinguished by the fact that linear depressions are formed in the printing plates in order to create a print image. In the case of the mechanically produced intaglio printing plate, due to the normally conical shape of the engraving tool, increased engraving depth produces a broader line. Furthermore, the ink capacity of the engraved line and thus the opacity of the printed line increases with increasing line depth. For the etching of intaglio printing plates, the non-printing areas of the  
10 plate are covered with a chemically inert lacquer. During the subsequent etching, the engraving is created in the exposed areas of the plate, such that the depth and width of the engraved lines depend in particular on the etching duration.

A process is known from WO 97/48555, with which intaglio printing plates can be  
15 produced in a reproducible, mechanical manner. To that end, the lines on a line original are recorded and the area of every line is determined exactly. With an engraving tool, for instance a rotating graver or a laser beam, firstly the outer contour of this area is engraved, to provide a clean outline around the area. Next, the outlined region of the area is cleared out with the same or another engraving tool, so that the  
20 entire line is exactly engraved according to the line original. Depending on the shape and movement of the engraving tool, on the base of the cleared area, a floor roughness pattern is formed, which serves as an ink trap for the printing ink.

It is also possible, within a first engraved area, to engrave a second area with a greater  
25 engraving depth, so that, due to the different thicknesses of ink application, the printed image has two adjacent areas of differing colour intensity. Following the printing process, however, the differences of thickness become blurred, since the inks in the inked areas run into one another, with the result that a sharp optical separation between the inked areas in the printed image does not come about and thus no fine  
30 image structures can be reproduced.

It is therefore the aim of the present invention to provide measures that enable adjacent ink areas to be created with the intaglio printing process, which are clearly delimited from each other.

- 5 This aim is fulfilled according to the invention with the features of the non-dependent claims. Further developments of the invention are the subject of the subclaims.

Of essential importance is the fact that in order to create adjacent areas of ink, the engraved areas on the printing plate assigned to colour areas are separated from each  
10 other with a separating edge, which is pointed at the level of the plate surface. If a data medium, such as a bank note, is printed with a printing plate of this type, then adjacent areas of ink are created which pass through a minimum in the border region.

In an ideal case, the ink layer thickness is zero at the border line between the areas of  
15 ink. However, if the printing inks in the adjacent areas of ink join each other in the immediate region of the border, it can be slightly greater than zero. This is especially the case if the flanks of the separating edge are steep and have a small flank angle. The flatter the flanks of the separating edge, the more gradually the ink layer thickness tends to the ink layer minimum thickness in the edge region. In this way, a very fine  
20 lighter border line, only perceptible under magnification, for instance with a magnifying glass, can be formed between the adjacent ink areas, which can serve as an additional - on normal observation, hidden - security feature.

By means of the invention, it is possible for the first time to create immediately  
25 adjacent ink areas with differing layer thicknesses using the intaglio printing process, which do not run into one another and are clearly delimited from each other.

Depending on the engraving depth, in this way, different colour tones can be created with the same printing ink. Using commercially available intaglio printing inks,  
30 engraving depths in the region of 5 to 60  $\mu\text{m}$  lead to ink layers with a translucent, glazed colour appearance. In this connection, lighter colours are normally more strongly translucent than dark ones. With engraving depths of about 60 to 100  $\mu\text{m}$ , on the other hand, ink layers with a more opaque coloured appearance result. Thus, using

three different translucent printing inks, for instance, in combination with just two different engraving depths, six different colour tones can be produced in a single printing process. With an engraving depth of about 100  $\mu\text{m}$  and above, the ink layers thereby produced on a printed document can be easily felt, so that using the printing  
 5 plates according to the invention, not only the visual colour appearance, but also the tactile characteristics of a printed document can be specifically adjusted.

The invention is described in more detail below with the aid of figures. The figures are sketches illustrating the principle and are not reproduced to scale, particularly with  
 10 regard to the layer thicknesses.

They show the following:

Fig.1 Portion of a printing plate in cross-section.  
 15

Fig. 2 Portion of a data medium with two adjacent ink layers with differing ink layer thicknesses, shown schematically in cross-section.

Fig. 3 Portion of a data medium with two adjacent ink layers in cross-section.  
 20

Fig. 1 shows a printing plate 1 in cross-section with a printing plate surface 2, into which a first engraved area 3a with an engraving depth  $t_a$  and a second engraved area 3b with an engraving depth  $t_b$  are engraved. The two engraved areas 3a, 3b are immediately adjacent to each other at the level of the printing plate surface 2 and are  
 25 otherwise separated from each other by a separating edge 5 whose upper edge 6 is pointed at the level of the printing plate surface 2. The printing plate can also be designed so that the upper edge 6 lies slightly - that is a few  $\mu\text{m}$  - below the level of the printing plate surface 2. The flanks of the engraved areas 3a, 3b also simultaneously form the flanks of the separating edge and subtend a flank angle to the  
 30 perpendicular to the upper edge 6. In Fig.1, only the flank angle  $\alpha$  of the right flank of the separating edge is shown, since both the flank angles are equal in the example shown. The two flank angles of the separating edge 5 could, however, be made



different. The flank angles can lie within the range of  $15^\circ$  to  $60^\circ$ , and preferably lie between  $30^\circ$  and  $50^\circ$ .

5 Comparisons have shown that printing plates with the preferred flank angle in the range between  $30^\circ$  and  $50^\circ$  have better printing qualities. These include a good edge sharpness in the printed image and a reduced tendency to ink spattering, leading to bleeding of the edges in the printed areas on the printed object.

10 The floor surfaces 7a and 7b of the engraved areas 3a, 3b can be flat (7a) or have a floor roughness pattern (7b). The floor roughness pattern is advantageous since the printing ink is held better on the floor of the engraving. The engraved areas 3a and 3b can also converge to a point at the bottom, so that they have no floor surface (not shown).

15 The engraving depth  $t$  of the engraved areas 3a, 3b lies in the region between  $5\text{ }\mu\text{m}$  and  $250\text{ }\mu\text{m}$ , and preferably in the range between  $5\text{ }\mu\text{m}$  and  $150\text{ }\mu\text{m}$ .

20 The engraved plates are also suitable for duplication by means of conventional moulding techniques for intaglio printing plates. In this way, the engraved original is reproduced multiple times by means of intermediate steps and only the reproductions used as printing forms. Engravings with the preferred flank angles and engraving depths have proved particularly advantageous for the moulding and separation procedures required for reproduction.

25 Fig. 2 shows a portion of a data medium 10 with a printed image including two ink areas 12a, 12b, shown in a schematically simplified form. The data medium 10 was printed with a printing plate 1 as shown in Fig. 1, using the intaglio printing process. During the printing process, the data medium 10 is pressed into the engraved areas 3a, 3b, such that on the underside 17 of the data medium, depressions 11a, 11b can remain  
30 lastingly. The upper surface 15 of the data medium has raised parts in the areas 11a, 11b, such that these raised parts are covered with ink layers 13a, 13b, which were taken up by the upper surface 15 of the data medium from the engraved areas 3a, 3b. The ink layers 13a, 13b form the ink areas 12a, 12b with their surfaces. The ink layer

thickness  $D_a$ ,  $D_b$  is given by the level difference between the unprinted substrate surface and the surfaces of the respective ink areas 12a, 12b. In the border region B, the ink layer thicknesses  $D_a$  and  $D_b$  decrease continually towards a border line, which is defined by the upper edge 6 of the separating edge 5 of the printing plate 1.

- 5 Depending on the flank angle  $\alpha$  chosen and according to the engraving depth  $t$ , a more or less wide border region B is formed. Since the ink layer thicknesses  $D_a$  and  $D_b$  in the border region B decrease continually, by suitable choice of the flank angle  $\alpha$ , a border line of light colour tone can be formed that is not discernible with the unaided human eye.

10

Ideally, the ink layer thicknesses  $D_a$  and  $D_b$  reduce at the border line to a minimum ink layer thickness of 0. However, slight combination of the ink areas 12a, 12b can take place without any discernible colour mixing taking place. Fig. 3 illustrates this case. It can be seen that at the border line 16, combination of the ink areas 12a and 12b has

- 15 taken place.

The ink layers 13a and 13b can consist of printing inks of different colour, since mixing of the inks in different engraving areas is practically non-existent, because of the design of the printing plate according to the invention. If, however, the same  
 20 translucent printing ink is used for the adjacent engraved areas 3a, 3b with different engraved depths  $t_a$ ,  $t_b$ , the ink layers 13a and 13b produce different colour tones in the printed image.

The adjacent engraved areas can be made up of lineshaped or planiform depressions.  
 25 The depressions are preferably engraved with a rotating graver having a flank angle corresponding to the required flank angle of the separating edge. Alternatively, the engraving graver can also be moved along paths forming two systems. The curves or straight lines of a system run parallel to each other and cross the curves or straight lines of the second system at regular intervals. In this way, a floor roughness pattern in  
 30 the form of a grid pattern with particularly favourable ink trapping properties is formed. Preferably, the graver comes to a point or has a special contour which allows a floor roughness pattern to be created on the floor surface of the engraving, this serving as an ink trap. To this end, the graver is moved at regular, small distances

parallel to a previously engraved path, so that the previously engraved depression is widened by this distance. The engraving depth lies in the region of 5 to 250  $\mu\text{m}$ , and preferably 5 to 150  $\mu\text{m}$ .

- 5 The preferred flank angle in the region of  $30^\circ$  to  $50^\circ$  enables a longer working life for the engraving tool, while simultaneously producing an excellent printing result from the engraved printing plate. Tools with flank angles in the region of  $30^\circ$  are particularly suited to the engraving of fine filigree and small-area structures, while for the engraving of large-area and coarser structures, tools with flank angles of  $40^\circ$  to
- 10  $50^\circ$  are preferable.

- One or more lineshaped or planiform depressions can represent a pattern, a graphical symbol or a text symbol. Multiple adjacent depressions can form a regular grid, so that the printed image produced appears homogeneous, whereby the grid creates a fine
- 15 structure in the printed image, which is only perceptible using magnifying devices.

## Claims

1. Data medium (1) with a printed image produced by the intaglio printing process, having at least one first ink area (12a) with a first ink layer thickness ( $D_a$ ) and at least one second ink area (12b) with a second ink thickness ( $D_b$ ), adjacent to the first ink area, whereby the ink layer thicknesses ( $D_a$ ,  $D_b$ ) are different, characterized in that the first and second ink areas (12a, 12b) are directly adjacent to each other and are separated from each other by a sharp border line not visible to the naked eye, and that the ink layer thickness of both ink areas (12a, 12b) passes through a minimum in the region of the border line.
2. Data medium according to Claim 1, characterized in that the minimum is an ink layer thickness of almost zero.
3. A data carrier according to claim 1 or 2, characterized in that the ink areas are of linear or areal form.
4. Data medium according to Claim 1 or 2, characterized in that the first ink area (12a) and/or the second ink area (12b) represent a pattern, graphical symbol or text symbol.
5. Printing plate (1) for the printing of adjacent ink areas (12a, 12b), including a printing plate surface (2) and engraved in the printing plate surface (2), at least one first engraving area (3a) with a first engraving depth ( $t_a$ ) and at least one second engraving area (3b) with a second engraving depth ( $t_b$ ) adjacent to the first engraving area (3a), such that the engraving depths ( $t_a$ ,  $t_b$ ) are different, characterized in that between the first and the second engraved areas (3a, 3b), is arranged a separating edge (5) the upper edge (6) of which runs towards a point at the level of the printing plate surface (2).
6. Printing plate according to Claim 5, characterized in that the

separating edge (5) has flank angles ( $\alpha$ ) in the region between 15° and 60°, preferably between 30° and 50°, relative to the perpendicular to the printing plate surface (2).

- 5      7.              Printing plate according to Claim 5 or 6, characterized in that the first and second engraving depths ( $t_a$ ,  $t_b$ ) lie in the region between 5 and 250  $\mu\text{m}$ .
8.              Printing plate according to Claim 7, characterized in that the first  
10      and second engraving depths ( $t_a$ ,  $t_b$ ) lie in the region between 5 and 150  $\mu\text{m}$ .
9.              A printing plate according to at least one of Claims 5 to 8, characterized in that the engraved areas are formed by linear or areal depressions.
- 15              10.              Printing plate according to at least one of the claims 5 to 8, characterized in that the first engraved area (3a) and/or the second engraved area (3b) form a pattern, a graphical symbol or a text symbol.
- 20              11.              Printing plate according to at least one of the claims 5 to 10, characterized in that the first and/or the second engraved area (3a, 3b) have a floor area (7) having a floor roughness pattern.
- 25              12.              Intaglio printing process for the printing of adjacent ink areas (12a, 12b) with different ink layer thicknesses ( $D_a$ ,  $D_b$ ) whereby a printing plate according to one of the claims 5 to 11 is used.
- 30              13.              Process for the manufacture of a printing plate (1) for the printing of adjacent ink areas (12a, 12b) with different ink layer thicknesses ( $D_a$ ,  $D_b$ ), including the following steps:

- 10 -

- Provision of a printing plate (1) with a printing plate surface (2)  
and

- Engraving of a first engraving area (3a) with a first engraving depth ( $t_a$ ) and a second engraving area (3b) with a second engraving depth ( $t_b$ )  
5 in the printing plate surface (2), such that between the first engraving area (3a) and the second engraving area (3b), a separating edge (5) remains, having an upper edge (6) which runs towards a point at the height of the printing plate surface (2).

10 14. A method for producing a printing plate according to claim 13, characterized in that the engraved areas are formed by linear or areal depressions.

15 15. Process according to Claim 13, characterized in that the separating ridges (5) are formed with flank angles ( $\alpha$ ) in the region of  $15^\circ$  to  $60^\circ$ , preferably  $30^\circ$  to  $50^\circ$  relative to the perpendicular to the printing plate surface.

20 16. Process according to any one of Claims 13 to 15, characterized in that an engraving tool with a suitable flank angle ( $\alpha$ ) is used for engraving.

17. Process according to Claim 16, characterized in that a rotating graver coming to a point is used for engraving.

25 18. Process according to at least one of the claims 13 to 17, characterized in that the engraving depths ( $t_a$ ,  $t_b$ ) are created in the region from  $5\ \mu\text{m}$  to  $250\ \mu\text{m}$ .

30 19. Process according to Claim 18, characterized in that the engraving depths ( $t_a$ ,  $t_b$ ) lie in the region from  $5\ \mu\text{m}$  to  $150\ \mu\text{m}$ .

- 11 -

20. Process according to at least one of the claims 13 to 19, characterized in that in the first engraving area (3a) and/or in the second engraving area (3b), a floor area (7) with a floor roughness pattern is created.
- 5 21. Process according to at least one of the claims 13 to 20, characterized in that several adjacent first engraving areas (3a) and one or more adjacent second engraving areas (3b) are engraved in the printing plate surface (2).
- 10 22. Process according to at least one of the claims 13 to 21, characterized in that the first or the several first engraving areas (3a) and/or the second or the several second engraving areas (3b) are arranged in the form of a pattern, graphical symbol or text symbol.

FIG.1

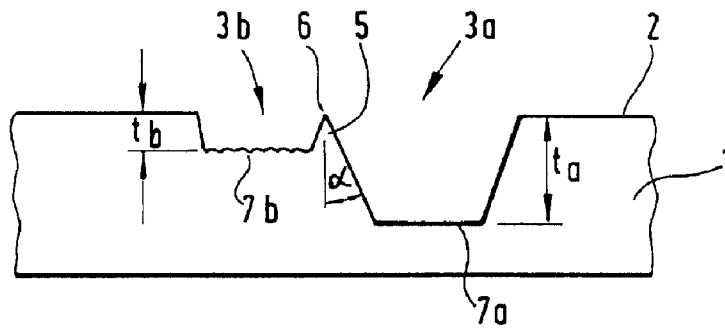


FIG.2

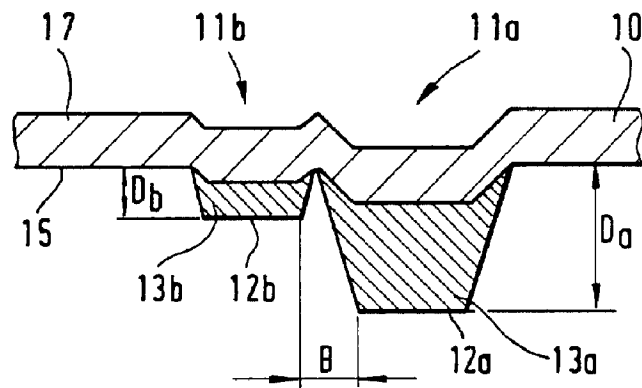


FIG.3

